


# Technical Information: IP68 METRIC PERFECT NYLON CABLE GLAND

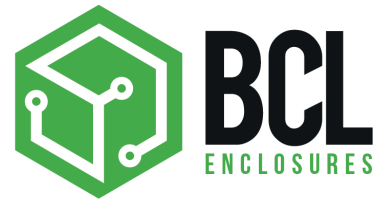

## FEATURES

Made from Nylon PA6

Up to IP68 at 5 Bar

Temp range -20°C to +100°C

Wall thickness 1-4mm




PRODUCT CODE	COLOUR	SIZE	H (MM)	L (MM)	ØC (MM)
B50.612.PA7035	Grey RAL 7035	M12	31	8	3 - 6
B50.616.PA7035	Grey RAL 7035	M16	35.5	8	5 - 10
B50.620.PA7035	Grey RAL 7035	M20	36	8	8 - 13
B50.625.PA7035	Grey RAL 7035	M25	43	8	11 - 17
B50.612.PA/SW	Black RAL 9005	M12	31	8	3 - 6
B50.616.PA/SW	Black RAL 9005	M16	35.5	8	5 - 10
B50.620.PA/SW	Black RAL 9005	M20	36	8	8 - 13
B50.625.PA/SW	Black RAL 9005	M25	43	8	11 - 17

VIEW OUR ENTIRE RANGE AT [BCLENCLOSURES.COM](https://www.bclenclosures.com)



# Technical Information: LOCKNUTS

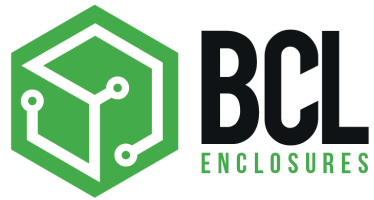

## FEATURES

Hexagonal locknuts

Material: Polyamide PA6 GF30

PRODUCT CODE	COLOUR	SIZE	H (MM)	MATERIAL	TEMPERATURE RATING
B50.212.PA7035	Grey RAL 7035	M12	5	PA6 GF30	-20°C to +100°C
B50.216.PA7035	Grey RAL 7035	M16	5	PA6 GF30	-20°C to +100°C
B50.220.PA7035	Grey RAL 7035	M20	6	PA6 GF30	-20°C to +100°C
B50.225.PA7035	Grey RAL 7035	M25	6	PA6 GF30	-20°C to +100°C
B50.212.PA/SW	Black RAL 9005	M12	5	PA6 GF30	-20°C to +100°C
B50.216.PA/SW	Black RAL 9005	M16	5	PA6 GF30	-20°C to +100°C
B50.220.PA/SW	Black RAL 9005	M20	6	PA6 GF30	-20°C to +100°C
B50.225.PA/SW	Black RAL 9005	M25	6	PA6 GF30	-20°C to +100°C

VIEW OUR ENTIRE RANGE AT [BCLENCLOSURES.COM](https://www.bclenclosures.com)

