


Technical Information: CYLINDRICAL FUSE HOLDERS

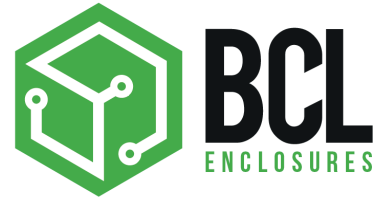

FEATURES

Horizontal and vertical mounting options

Bayonet carrier with finger or screwdriver release

Anti Solder Wicking

Manufactured in accordance with IEC 127-6 & UL512


Compact footprint 10mm pitch

UL, VDE approved



PRODUCT CODE	RATING	CONTACTS MATERIAL	CONTACT RESISTANCE	ORIENTATION	BODY MATERIAL	DIELECTRIC STRENGTH	POWER DISS.	PCB HOLE SIZE	INSULATION RESISTANCE
BFH06	10A - 250V	Tinned Nickel Plated Brass	<5mΩ	Vertical	UL94 V0 Flame Retardant PBT	3KV/60°	2.5W	1.5mm	100MΩ
BFH07	10A - 250V	Tinned Nickel Plated Brass	<5mΩ	Horizontal	UL94 V0 Flame Retardant PBT	3KV/60°	2.5W	1.5mm	100MΩ

Technical Information: PCB FUSE HOLDERS

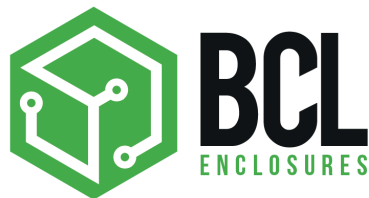

FEATURES

Insulated fuse carrier

Retainer with finger proof

Enclosed contacts

PCB mounting with 22.6mm pin pitch

Molded in flame retardant UL94V-0 Polyamide

Manufactured in accordance with IEC 127-6

UL approved

Available in green and black



PRODUCT CODE	COLOUR	RATING	CONTACTS MATERIAL	CONTACT RESISTANCE	BODY MATERIAL	DIELECTRIC STRENGTH	POWER DISS.	PCB HOLE SIZE	INSULATION RESISTANCE
BFH14-NG	Green	6.3A - 250V	Tinned Nickel Plated Brass	<5mΩ	UL94V-0 Flame Retardant PA	3KV/60°	2.5W	1.5mm	100MΩ
BFH14-HBNG	Green	6.3A - 250V	Tinned Nickel Plated Brass	<5mΩ	UL94V-0 Flame Retardant PA	3KV/60°	2.5W	1.5mm	100MΩ
BFH14-N	Black	6.3A - 250V	Tinned Nickel Plated Brass	<5mΩ	UL94V-0 Flame Retardant PA	3KV/60°	2.5W	1.5mm	100MΩ
BFH14-HBN	Black	6.3A - 250V	Tinned Nickel Plated Brass	<5mΩ	UL94V-0 Flame Retardant PA	3KV/60°	2.5W	1.5mm	100MΩ